



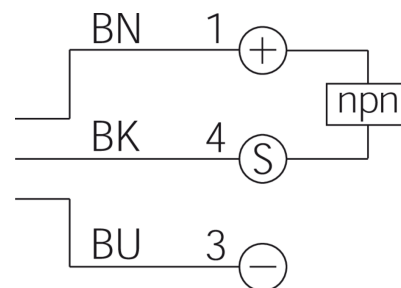

212988 OR21-NS-0.3T3 Retroreflective sensor

- Miniature design
- Mounting element made of metal
- High switching frequency
- Long range

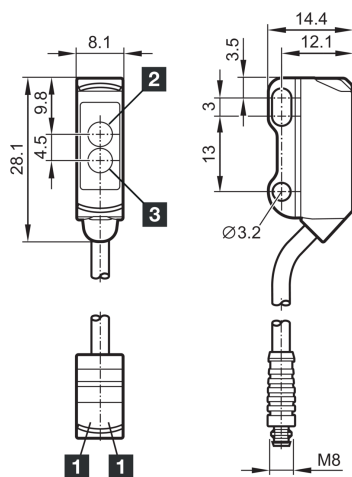

1) LED
2) Receiver

3) Transmitter

BK: black

BN: brown

BU: blue

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	10 ... 30 V DC
No-load current (max.)	20 mA
Inverse polarity protection	Yes
Housing dimensions	28.1 x 8.1 x 14.4 mm
Housing length	8.1 mm
Housing height	28.1 mm
Housing width	14.4 mm
Housing material	Stainless steel / Plastic
Material of cable	PVC
Material	Plastic (Window / optics)
Weight	21 g
Protection class	III, operation on protective low voltage
Operating principle	Retroreflective sensor
Evaluation	digital
Design	Cuboid design
Switching output	npn, 100 mA, NO
Voltage drop (max.)	2.5 V
Light source	LED
Color	red
Wavelength	633 nm



212988
OR21-NS-0.3T3
Retroreflective sensor

Technical data (typ.)		+20°C, 24 V DC
Modulation		Clocked
Light spot size		Ø 120 mm (at distance of 1800 mm)
Range		20 ... 1800 mm
Standardized measuring plate		200 x 200 mm (white)
Referring reflector		R 19 x 54 mm
Sensitivity adjustment		no setting elements
Display		LED Green - Operation, yellow - Switching output
Switching frequency		1000 Hz
Ambient temperature during operation		-25 ... +60 °C
Protection type		IP 65 / IP 67
Connection		Pigtail, 0.3 m, M8, 3-pin
Connection cable		TK ...
More information / accessories		https://www.di-soric.com/212988