


CS 60 Vision Sensor

-

[illegible]

© dj-soric . Right to change reserved . 06.02.2024 . Page 1

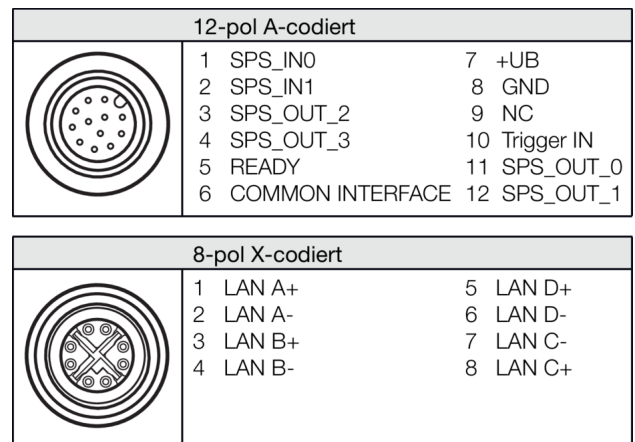

213363
CS60-BM38-EP15/400ID
CS 60 Vision Sensor

Technical data (typ.)	+20°C, 24 V DC
Voltage drop (max.)	2 V
Interface	■ Ethernet ■ Digital Input/Output
Protocols	TCP/IP, FTP/SFTP, Profinet
Color	Red / white switchable (internal)
Focal length	8 mm (exchangeable S-mount lens)
Optical format	1/2.9"
Resolution	1456 x 1088 Pixel
Working distance	50.0 ... 2000 mm
Display	LED Green - Operation, yellow - DATA-Link yellow - Trigger
FPS - Frames Per Second (max.)	30 images/second
Flash length	< 2 ms
Ambient temperature during operation	0 ... +50 °C
Vibration/shock resistance	10 to 55 Hz / 1.0 mm / 30 g / 11 ms
Protection type	IP 67
Connection	Connector, M12, 12-pin (A-coded)
Connection 2	Socket, M12, 8-pin (X-coded)
Cable	Connection cables max. 25 m
More information / accessories	https://www.di-soric.com/213363