


Barlight

-

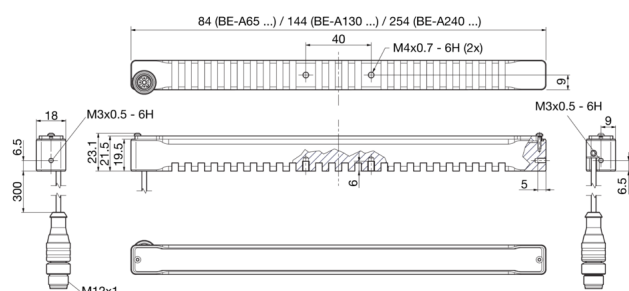

BU: blue

BN 1 (+)
BK 4 not connected
BU 3 (-)

[illegible]

+20°C, 24 V DC

Service voltage	24 V DC (Supply Class 2)
Internal power consumption	260 mA (24 V DC)
Power	6.2 W (24 V)
Inverse polarity protection	Yes
Illuminated area	130 x 12 mm
Housing material	Aluminum (Black, Anodized)
Material	PMMA, clear (Protection optics)
Weight	105 g
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Free group
Design	Barlight
Operating modes	Static
Color selection	No
Light intensity can be adjusted	No
Trigger input high level	No trigger
Trigger input low level	No trigger
Trigger presets	No trigger
Interface	No
Light source	LED
Color	Infrared
Wavelength	850 nm
Deflection angle FWHM	18°
Control	without power control
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1.0 mm
Ambient temperature during operation	0 ... +40 °C
Protection type	IP 40



213572
BE-A130-G0-K-BS
Barlight

Technical data (typ.)

Connection

+20°C, 24 V DC

Pigtail, 0.3 m, M12, 3-pin

More information / accessories<https://www.di-soric.com/213572>