




213574
BE-A130-G3-K-BS
Barlight

- Robust solid metal aluminum housing
- Variable cable outlet with strain relief
- High effectiveness due to the latest LED technology
- High efficiency due to optics with a small dispersion angle
- Optimal price-performance ratio
- Industrial-quality M12 connection
- New properties can be modeled with filter disks from the accessories
- Large assortment of mounting products available as accessories

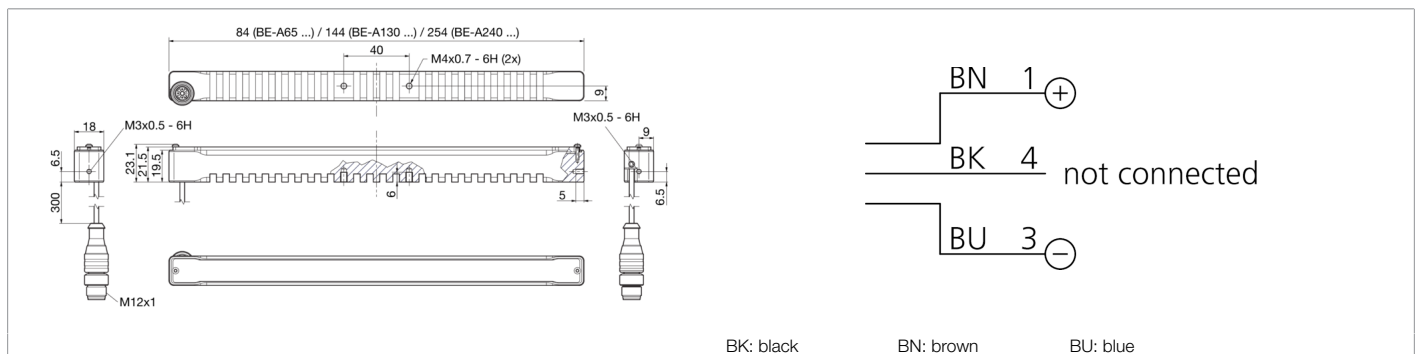

Function												
Technical data (typ.)										+20°C, 24 V DC		
Service voltage										24 V DC (Supply Class 2)		
Internal power consumption										280 mA (24 V DC)		
Power										6.7 W (24 V)		
Inverse polarity protection										Yes		
Illuminated area										130 x 12 mm		
Housing material										Aluminum (Black, Anodized)		
Material										PMMA, clear (Protection optics)		
Weight										105 g		
Protection class										III, operation on protective low voltage		
Risk group (DIN EN 62471)										Risk group 2		
Design										Barlight		
Operating modes										Static		
Color selection										No		
Light intensity can be adjusted										No		
Trigger input high level										No trigger		
Trigger input low level										No trigger		
Trigger presets										No trigger		
Interface										No		
Light source										LED		
Color										Blue		
Wavelength										465 nm		
Deflection angle FWHM										18°		
Light intensity										■ 21.0 kLx (100.0 mm) ■ 11.5 kLx (200.0 mm) ■ 3.00 kLx (500.0 mm)		
Control										without power control		



213574
BE-A130-G3-K-BS
Barlight

Technical data (typ.)**+20°C, 24 V DC**

Shock/vibration load

30 g, 11 ms / 10 ... 55 Hz, 1.0 mm

Ambient temperature during operation

0 ... +40 °C

Protection type

IP 40

Connection

Pigtail, 0.3 m, M12, 3-pin

More information / accessories<https://www.di-soric.com/213574>