

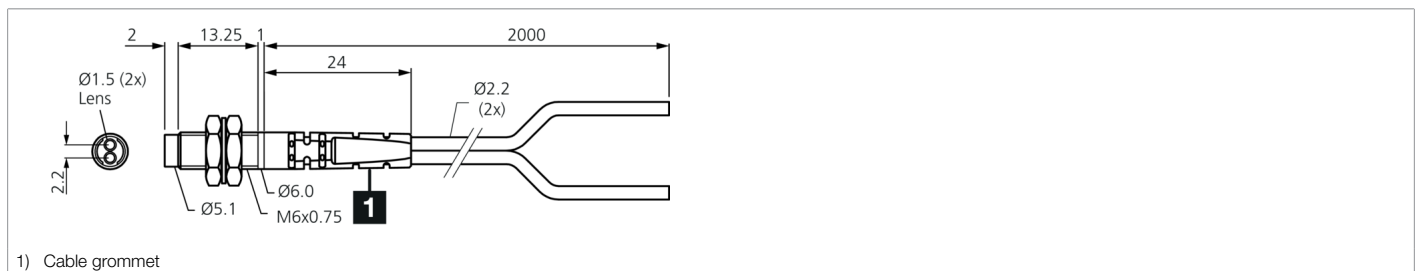







213586

KLT-M6-T2-1.5NB

Plastic fiber optics

- Integrated optics for narrow a light beam
- Large range
- Small parts detection
- Fiber optics with kink protection
- Cutting knife included



Function														
														

Technical data (typ.)	+20°C
Length	2,000 mm (Can be shortened)
Thread	M6 x 0.75
Light aperture	axial
Bending radius	> 15 mm
Fiber	Parallel, Ø 0.5 mm (2x)
Material	<ul style="list-style-type: none"> ■ Stainless steel (Sensor probe) ■ PE (Coating)
Operating principle	Diffuse sensor
Design	Thread
Characteristics	With cable protection bushing, Integrated optics
To be used for	Device series OLV-K Amplifier
Light spot size	Ø 4.0 mm (at distance of 15 mm)
Range	400 mm
Resolution	Ø 0.3 mm (at 15 mm distance)
Temperature resistance	-55 ... +70 °C

More information / accessories	https://www.di-soric.com/213586
--------------------------------	---