
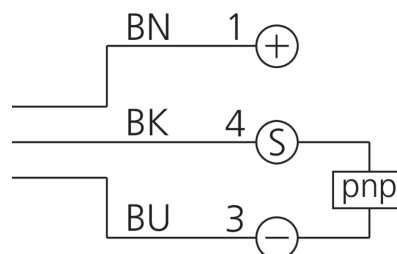


Fourche optique laser

-

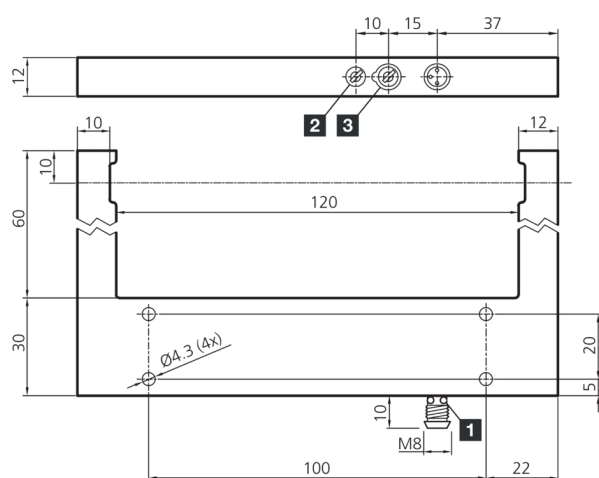

- BU: bleu

A diagram enclosed in a rectangular box. It shows a horizontal arrow pointing from left to right. On the left end of the arrow is a semi-circle with its flat side facing left. On the right end of the arrow is a semi-circle with its flat side facing right.



+20°C, 24 V DC

di-soric GmbH & Co. KG · Steinbeisstraße 6 · DE-73660 Urbach · www.di-soric.com



205655
LGUP 121 P3K-TSSL/V4A
Fourche optique laser

Caractéristiques techniques (typ)	+20°C, 24 V DC
Puissance laser	< 100 µW
Protection contre les lumières extérieures	5 kLx
Largeur de fourche	120 mm
Résolution	Ø 0,2 mm
Hystérésis de commutation (max.)	0,05 mm
Reproductibilité	0,02 mm
Réglage de la sensibilité	Potentiomètre
Fréquence de commutation	3000 Hz
Température ambiante de fonctionnement	0 ... +50 °C
Indice de protection	IP 67
Raccordement	Connecteur, M8, 3 pôles
Câble de raccordement	TK ...
Plus d'informations/d'accessoires	https://www.di-soric.com/205655