





IR 3

Lochblende
Light shutter
Diaphragme à trou

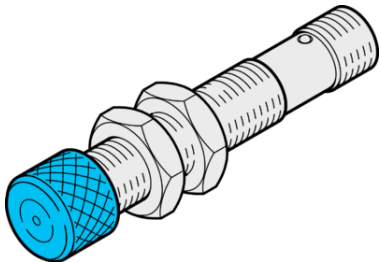

di-soric GmbH & Co. KG
Steinbeisstraße 6
DE-73660 Urbach
Germany
Tel: +49 (0) 7181/9879-0
info@di-soric.com · www.di-soric.com




Technische Daten	Technical data	Caractéristiques techniques	+20°C, 24 V DC
Geeignet für	To be used for	Convient pour	Hochleistungs-Lichtschraken M12x1 / High performance light barriers M12x1 / Détecteurs photoélectriques haute performance M12x1
Material	Material	Matériau	Metall / Metal / Métal


Stand 03.11.23, Änderungen vorbehalten
As of 11/03/23, subject to change
État 03.11.23, sous réserve de modifications

IR 3

遮光孔

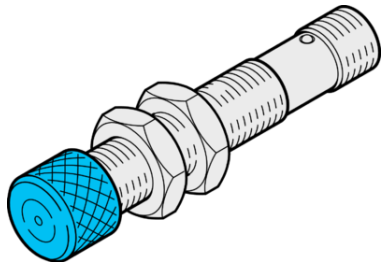

di-soric GmbH & Co. KG
Steinbeisstraße 6
DE-73660 Urbach
Germany
Tel: +49 (0) 7181/9879-0
info@di-soric.com · www.di-soric.com



技术数据	+20°C, 24 V DC
适合用于	高性能光电开关 M12x1
材料	金属

版本 23.11.03，保留变更权