





HS-BW-18

Befestigungswinkel
Mounting bracket
Équerre de fixation

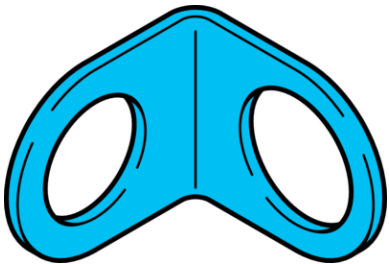

di-soric GmbH & Co. KG
Steinbeisstraße 6
DE-73660 Urbach
Germany
Tel: +49 (0) 7181/9879-0
info@di-soric.com · www.di-soric.com

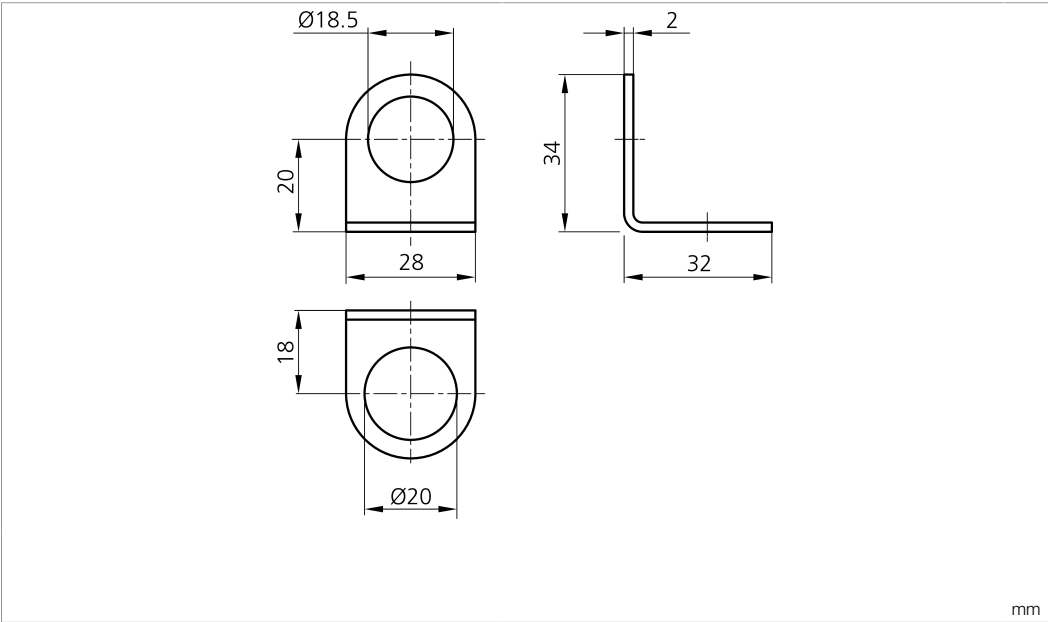


Technische Daten	Technical data	Caractéristiques techniques	+20°C
Produktserie	Product series	Gamme de produits	Z-UBT-KL-PH Produkthalterung / Z-UBT-KL-PH Product bracket / Support de produit Z-UBT-KL-PH
Durchm. Montagezapfen/Bohrung	Diameter Mounting pin / boring	Diam. tourillon de montage/alésage	Ø 18,5 / Ø 20 mm / Ø 18.5 / Ø 20 mm / Ø 18,5 / Ø 20 mm
Material	Material	Matériau	Edelstahl / Stainless steel / Acier inoxydable

Stand 03.11.23, Änderungen vorbehalten
As of 11/03/23, subject to change
État 03.11.23, sous réserve de modifications




HS-BW-18

固定角铁

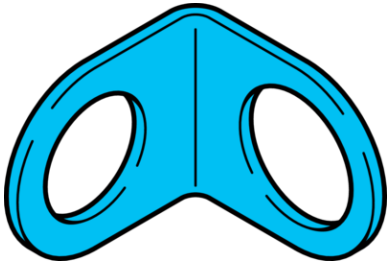

di-soric GmbH & Co. KG
Steinbeisstraße 6
DE-73660 Urbach
Germany
Tel: +49 (0) 7181/9879-0
info@di-soric.com · www.di-soric.com

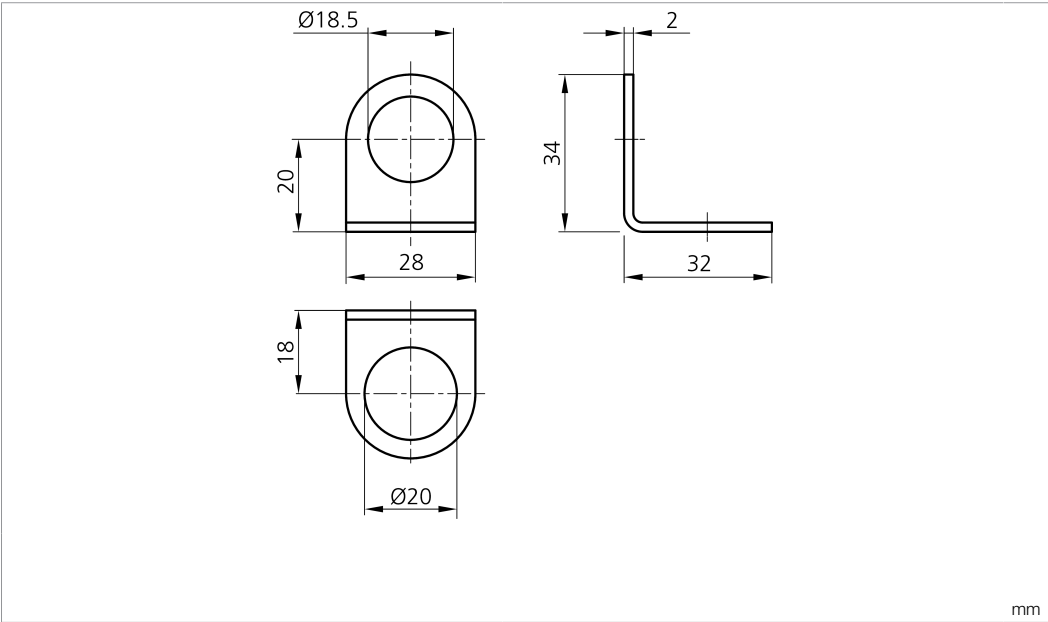


技术数据	+20°C
产品系列	Z-UBT-KL-PH 产品支架
直径装配栓/钻孔	Ø 18.5 / Ø 20 mm
材料	不锈钢

版本 23.11.03，保留变更权


Grundhalter Ø 12 mm

Basic system holder Ø 12 mm


12 mm du support Ø de système de base

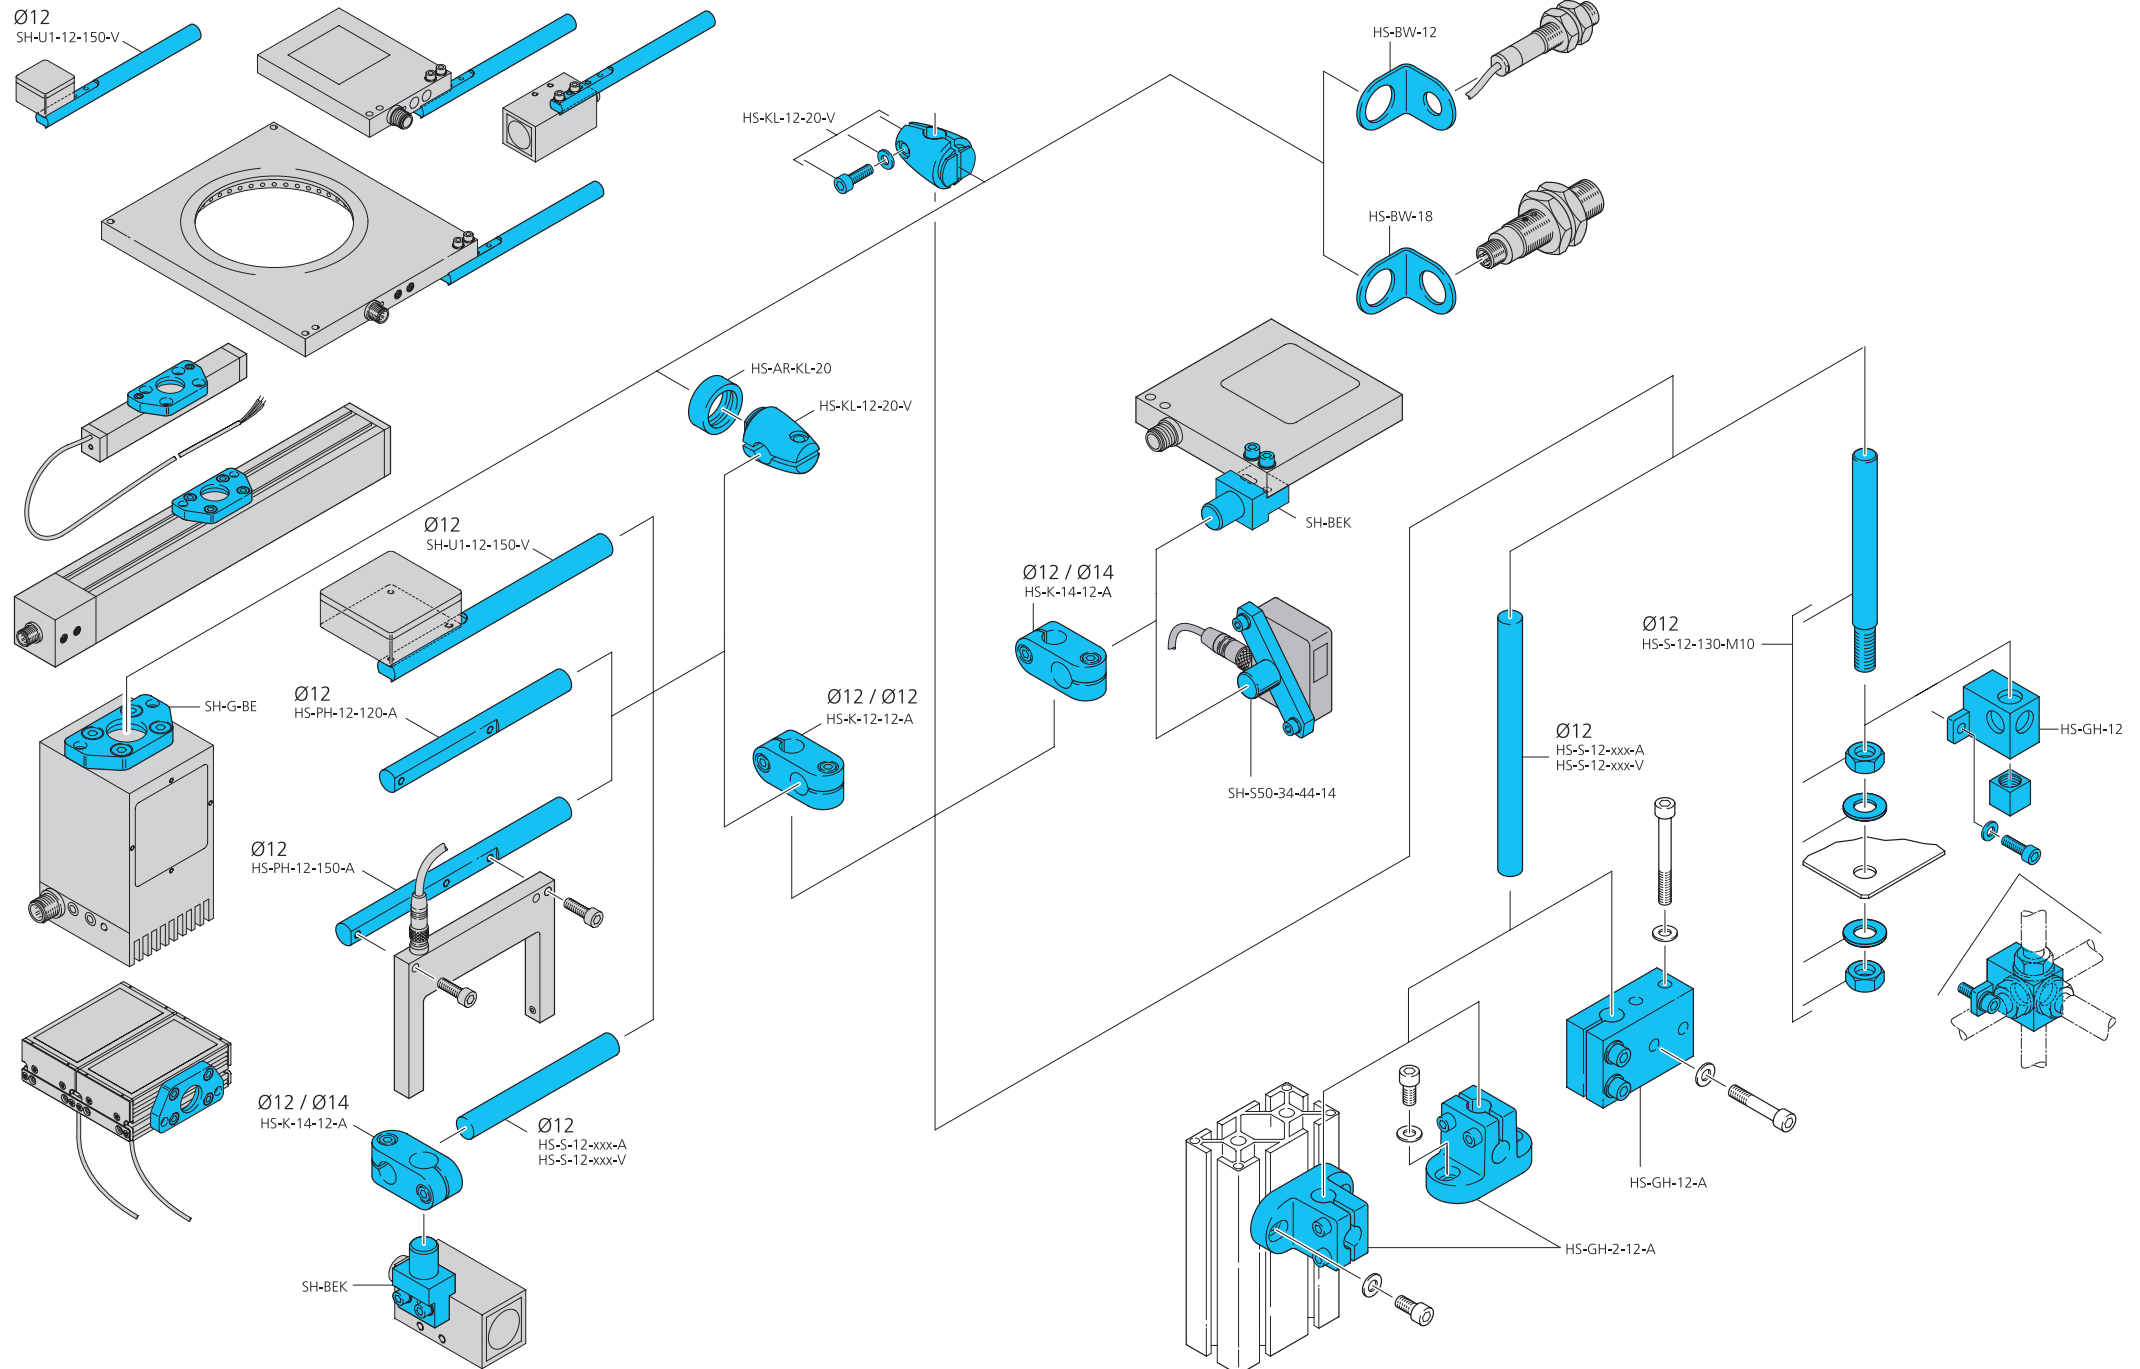

Grundhalter Ø 15 mm

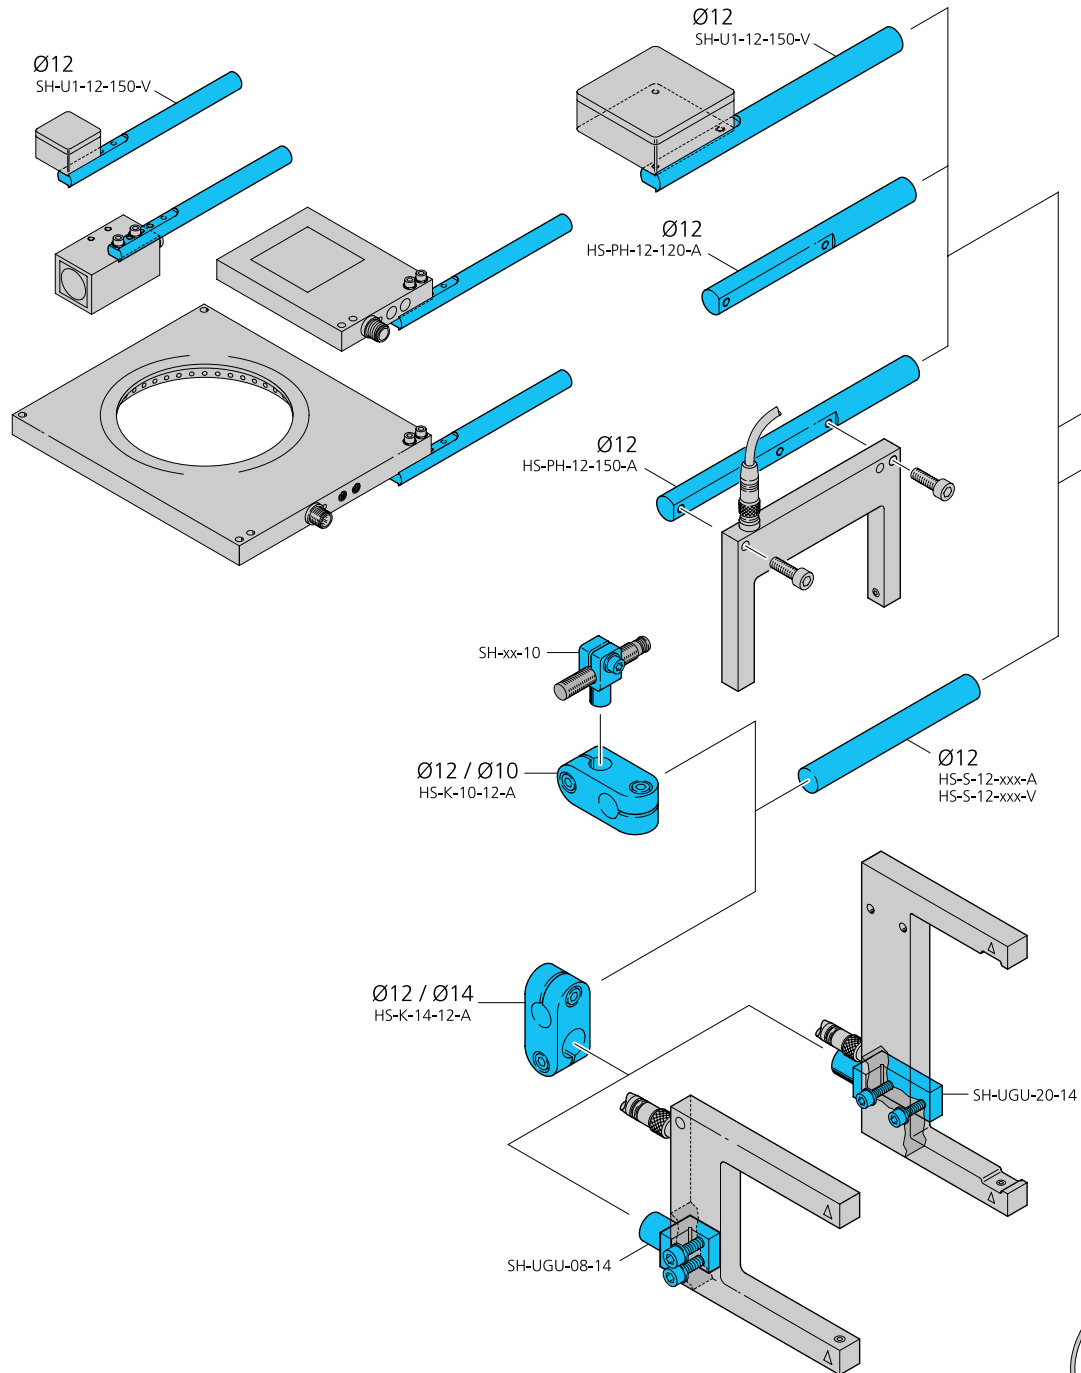

Basic system holder Ø 15 mm

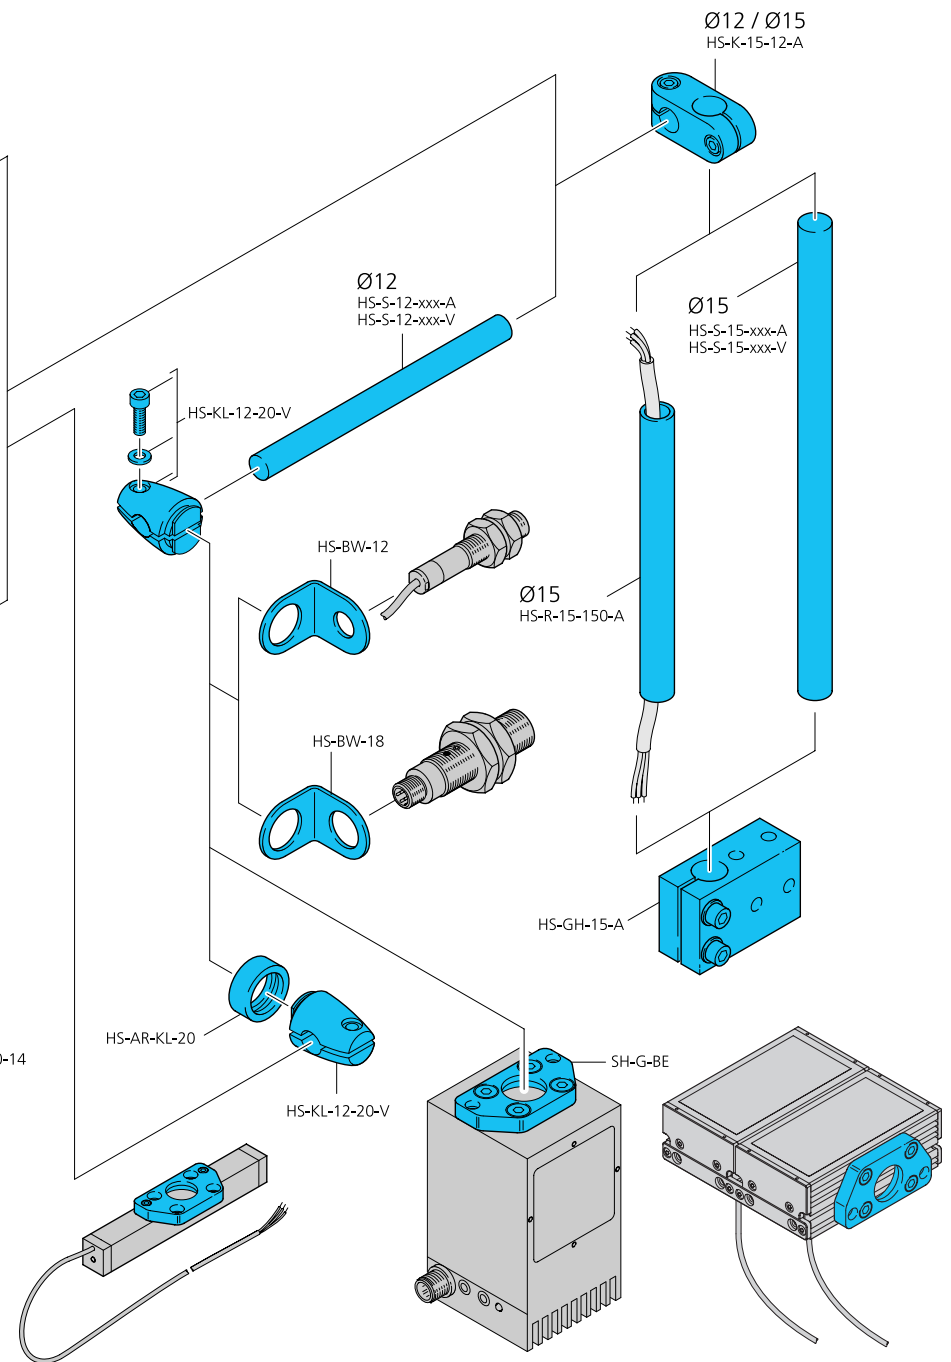

15mm du support Ø de système de base