




- 母头 M12,3针/公头 M8,3针
- 金属螺纹可旋转
- 高防护等级高达 IP 67



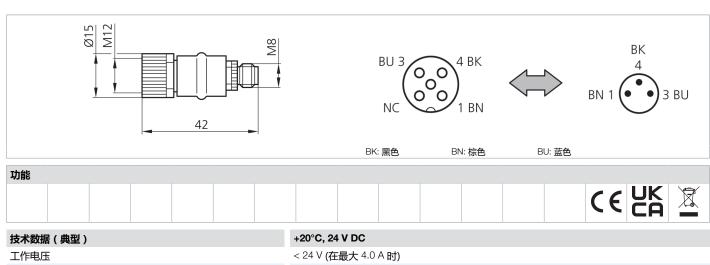

技术数据 (典型)	+20°C, 24 V DC
工作电压	< 24 V (在最大 4.0 A 时)
外壳材料	塑料
型式	直型
防护等级	IP 67
传感器侧连接	插口, M12 x 1, 3 针
控制器侧连接	插头, M8 x 1, 3 针
更多信息 / 附件	https://www.di-soric.com/201096