




203954
BSHM-W-2/8A
连接电缆

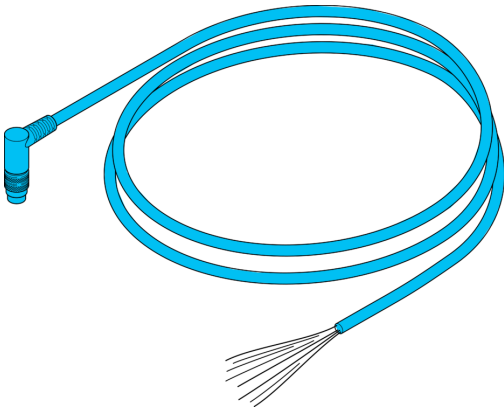

功能																	
技术数据 (典型)																	
长度														2,000 mm			
材料														■ PU 套 (护套) ■ PUR (插头)			
组件														连接电缆			
型式														弯型 / 裸露的电缆端部			
适用于														FSB 10 M G1-B8, FSB 50 M 60 G3-B8, FSB 50 M G3-B8, FS 50 M 60 G3-B8, FS 50 M G3-B8, FS 12-100-1 M G3-B8, FS 12-100-1 M G3-B8-E, FS 12-100-2 M G3-B8, FS 12-100-2 M G3-B8-PB			
用于 FSB 10 M G1-B8 交换机														合适的			
用于 FSB 50 M 60 G3-B8 交换机														合适的			
用于 FSB 50 M 60 G3-B8 交换机														合适的			
用于 FS 50 M 60 G3-B8 交换机														合适的			
用于 FS 50 M G3-B8 交换机														合适的			
用于 FS 12-100-1 M G3-B8 交换机														合适的			
用于 FS 12-100-1 M G3-B8-E 交换机														合适的			
用于 FS 12-100-2 M G3-B8 交换机														合适的			
工作环境温度														-25 ... +70 °C			
防护等级														IP 67			
连接														插头, M9, 8 针			
连接 2														裸端			
横截面														0.14 x 0.14 mm (8 x)			
更多信息 / 附件														https://www.di-soric.com/203954			