



-

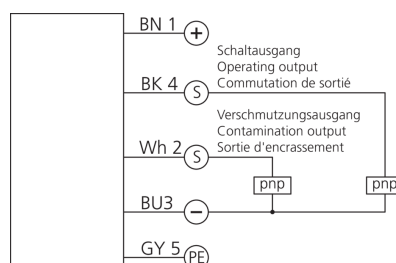

WH: 白色

A diagram enclosed in a square box. It shows a left half-circle (a semi-circle with its flat side on the left) followed by a right-pointing arrow, which is then followed by a right half-circle (a semi-circle with its flat side on the right).

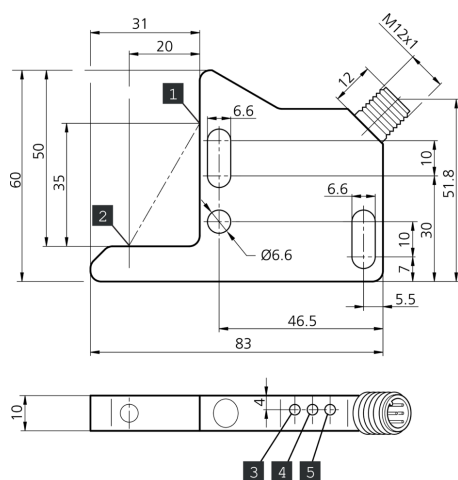

+20°C, 24 V DC

© di-soric . 保留变更权 . 2022.12.15 . 侧 1 (2)

**204201****OGL 50/31 P6L-RIBS/PE****高性能角型光电开关**

技术数据 (典型)	+20°C, 24 V DC
波长	660 nm
调制	调制
抗环境光	5 kLx
作用距离	40 mm (光轴)
灵敏度调整	没有调整元件
开关频率	200 Hz
工作环境温度	-10 ... +60 °C
防护等级	IP 67
连接	插头, M12, 5 针
连接电缆	VK ...
更多信息 / 附件	https://www.di-soric.com/204201