



**203737**
**DCC 08 M 1.5 PSLK/5m PVC**
**Inductive proximity switch**

- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

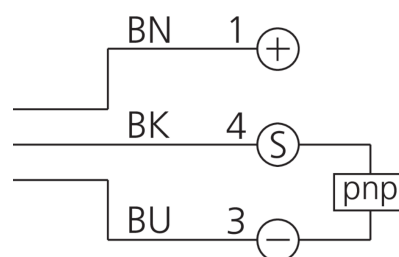

BK: black

BN: brown

BU: blue

**Function**

**Technical data (typ.)**
**+20°C, 24 V DC**

Service voltage	10 ... 30 V DC
No-load current (max.)	10 mA
Voltage drop (max.)	2,0 V
Insulation voltage endurance	500 V
Installation type	Flush
Thread	M8 x 1
Housing material	Stainless steel
Material	PVC (Cable)
Tightening torque (max.)	4 Nm
Protection class	III, operation on protective low voltage
Operating principle	inductive
Evaluation	digital
Design	Thread
Switching output	pnp, 200 mA, NO
Switching distance (SN)	1,5 mm
Standardized measuring plate	8 x 8 x 1 mm
Switching hysteresis (max.)	5 %
Switching frequency	5.000 Hz
Ambient temperature during operation	-25 ... +70 °C
Protection type	IP 67
Connection	Cable, 5,0 m

**More information / accessories**
<https://www.di-soric.com/203737>