
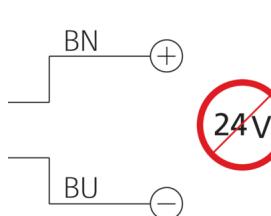


**207698  
BE-F150/150-F0-K  
Area light**

- High excess current factor
- Pulsed mode for inspection of fast moving objects
- Extremely powerful light for high depth of field
- Long life thanks to intelligent thermal management
- Homogeneous luminous field
- High protection type IP 67
- Robust metal housing

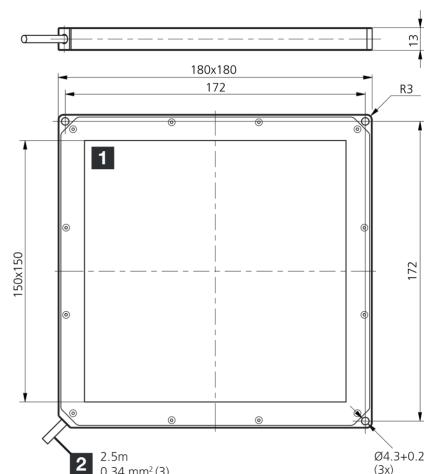

Betrieb ausschließlich mit Flash-Controller an einem Supply Class 2 - Netzteil!  
Use only with flash equipment driven by a power supply Class 2!  
A utiliser exclusivement avec un contrôleur d'impulsion connecté à une alimentation Class 2!

1) Illuminated area

2) Connection cable

#### Function



#### Technical data (typ.)

#### +20°C

Power consumption (in pulse / max.)	460 W
Energization factor (in pulse / max.)	19
Energization (in pulse / max.)	19200 mA
Service voltage	No constant voltage!
Insulation voltage endurance	500 V
Illuminated area	150 x 150 mm
Housing material	Aluminum (Black, Anodized)
Material	<ul style="list-style-type: none"> <li>■ Polyurethane (Cable)</li> <li>■ PC, opal diffuse (Protection optics)</li> </ul>
Risk group (DIN EN 62471)	Free group
Design	Area light
Light source	LED
Color	Infrared (diffuse)
Wavelength	850 nm
Control	Flashable by means of flash controller
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1.0 mm
Ambient temperature during operation	0 ... +40 °C
Protection type	IP 67
Connection	Cable, 2.5 m (flying leads, Use only with flash controller!)

 207698

BE-F150/150-F0-K

Area light

[More information / accessories](#)<https://www.di-soric.com/207698>