





213813
SBT-F-WBGR-R50-5S-B8
Signal column

- Status display 360°
- Good signal effect thanks to state-of-the art, efficient LEDs
- Low energy consumption
- Immediately usable, direct predefined segment activation
- Simple installation (M30 threading)
- Assembly accessories optionally available

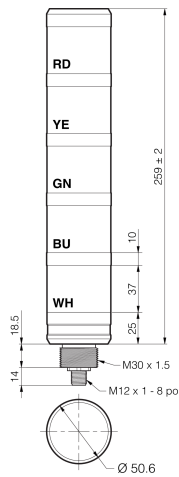

PIN	Signal	Connection cable wire color
1	Green LED	White
2	Yellow LED	Brown
3	Not Connected	Green
4	White LED	Yellow
5	Blue LED	Grey
6	Red LED	Pink
7	GND	Blue
8	Not Connected	Red

Function

--	--	--	--	--	--	--	--	--	--	--	--	--	--

Technical data (typ.)

+20°C, 24 V DC

Service voltage	24 V DC (Supply Class 2)
Internal power consumption	185 mA (24 V DC)
Power	4.4 W (24 V)
Inverse polarity protection	Yes
Illuminated area	50 x 37 mm (Ø x H / segment)
Number of segments	5
Housing material	Aluminum (natural, Anodized)
Material	Polycarbonate (Diffusor)
Weight	350 g
Protection class	III, operation on protective low voltage
Model	Signal column
Color selection	Red, green, yellow, blue, white
Number of inputs/outputs	5/0
Level (Hi/L0) inputs	24V / 0V
Color	Red, green, yellow, blue, white
Vibration load	10 ... 55 Hz / 0.35 mm
Ambient temperature during operation	0 ... +50 °C
Protection type	IP 65
Connection	Connector, M12, 8-pin
Connection cable	VK ... /8-SB



213813

SBT-F-WBGR-R50-5S-B8

Signal column

[More information / accessories](#)

<https://www.di-soric.com/213813>